

NEW



## RATE 3 LIGHTING SWITCHBOARD

316L STAINLESS STEEL

LOGIX ENGINEERING PTY LTD HAVE RECENTLY RECEIVED QUEENSLAND DEPARTMENT OF TRANSPORT AND MAIN ROADS APPROVAL FOR OUR 100A 415V 50HZ RATE 3 LIGHTING SWITCHBOARD. THIS SWITCHBOARD IS SUITABLE FOR ALL OUTDOOR LIGHTING APPLICATIONS AND INCLUDES AN INBUILT PHOTO ELECTRIC CELL.

Logix WBS Range of enclosures are manufactured from 316L Grade stainless steel and have a polished finish with a maximum roughness (Ra) of 0.4um.


Third party accreditation has been undertaken at the NATA registered Queensland Government Simtars Test Station for a degree of protection of IP66.

For further information please contact Tony Hamilton email [tony@logixeng.com.au](mailto:tony@logixeng.com.au) or telephone 0434 034 703.

### DIMENSIONS

Part Number	Height (mm)	Width (mm)	Depth (mm)	Weight (kg)
R3L8 5025   1*	800	500	250	30
R3L8 5025   2*	800	500	250	32
R3L8 5025   3*	800	500	250	34

\*Quantity of 3 phase lighting circuits required.

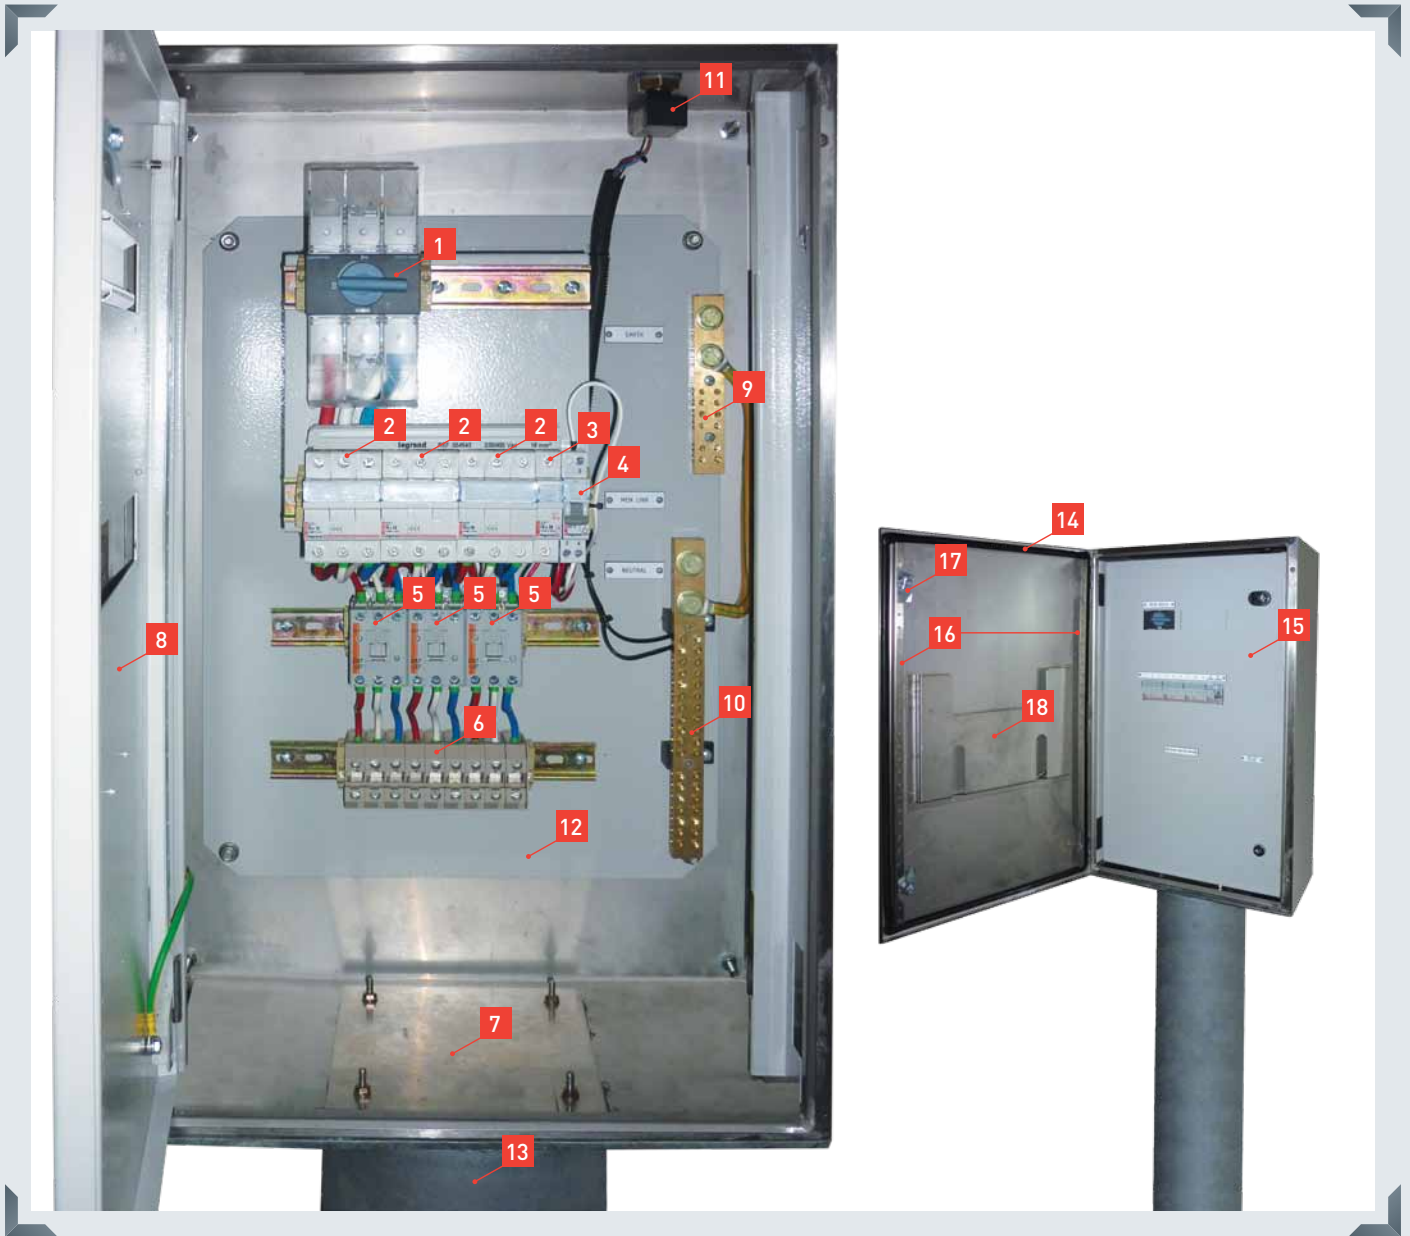

## FEATURES

## RATE 3 LIGHTING SWITCHBOARD

- |  |  |
|--|--|
| <ol style="list-style-type: none"> <li>1. Main switch 100A</li> <li>2. Submain fuses</li> <li>3. Control circuit fuse</li> <li>4. Lighting bypass switch</li> <li>5. Lighting contractors</li> <li>6. Lighting terminals to suit 35mm<sup>2</sup> cable</li> <li>7. Gland plate</li> <li>8. Inner door stainless steel</li> <li>9. Earth bar to suit 25mm<sup>2</sup> cable</li> <li>10. Neutral to suit 25mm<sup>2</sup> cable</li> </ol> | <ol style="list-style-type: none"> <li>11. Photo electric cell and stainless steel housing</li> <li>12. Mounting plate stainless steel</li> <li>13. Pedestal (not supplied by Logix)</li> <li>14. Continuous foamed in place gasket</li> <li>15. Hinged internal door stainless steel</li> <li>16. Door stiffener</li> <li>17. Enclosure door key lockable to TMR requirements</li> <li>18. Document holder stainless steel</li> </ol> |
|--|--|